


TRUSA PENTRU TAIERE OXI - GAZ OXY - GAS CUTTING KIT TTO * - 300

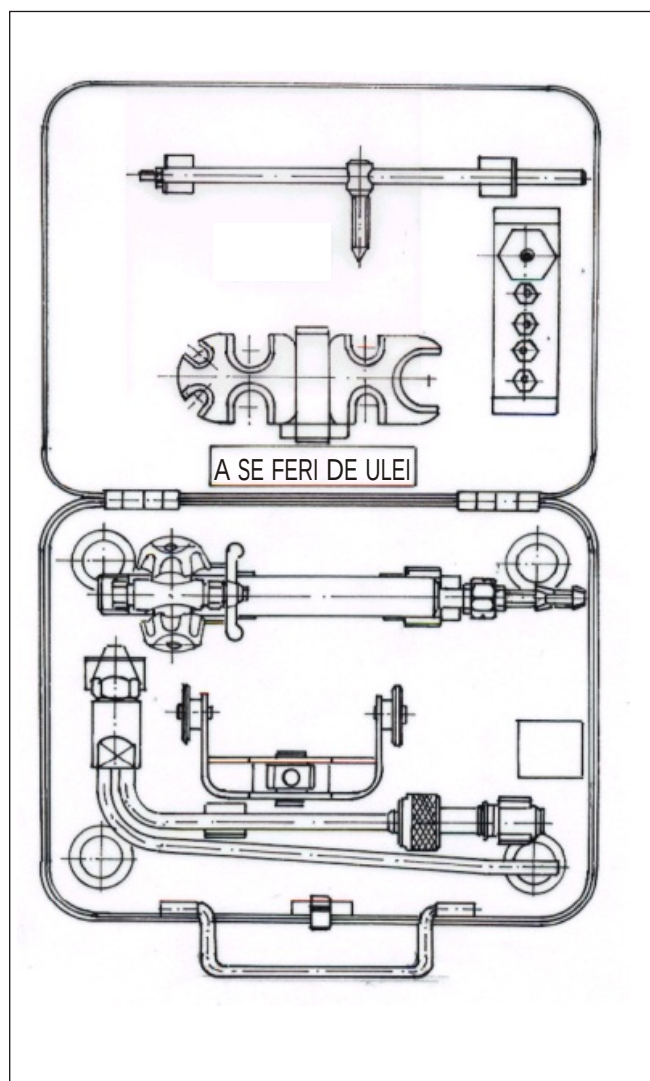

CARACTERISTICI TEHNICE TECHNICAL CHARACTERISTICS

- Grosime material de taiere :max. 300 mm.
- Presiune oxigen taiere :max.15 bar.
- Presiune gaz carburant :max. 0,5 bar.
- Racord intrare :
 - Oxigen :G1/4".
 - Gaz :G3/8"LH.
- Dimensiuni de gabarit :
 - Inchis :274x206x71 mm.
 - Deschis :410x274x39 mm.
- Thickness of material to be cut : max. 300 mm.
- Oxygen pressure for cutting : max.15 bar.
- Pressure fuel gas : 0,5 bar.
- Inlet connection : - Oxigen : G1/4".
 - Gas : G3/8"LH.
- Overall dimension :- closed : 247x206x71 mm.
 - open : 410x274x39 mm.

Simol gaz Gas symbol	
A (Acetilena) (Acetylene)	
P (Propan) (Propane)	
M (Metan) (Metane)	
GPL (gaz petrolier lichefiat) (liquified petroleum gas)	

TRUSE DE SUDARE SI TAIERE OXIGAZ;REDUCTOARE DE PRESIUNE PENTRU BUTELII DE GAZE;ROBINETI PENTRU BUTELII DE GAZE;
APARATE DE TAIERE OXIGAZ;GENERATOARE SI MINIGENERATOARE ACETILENA; ROBINETI CU SFERA; ECHIPAMENT MEDICAL;
ECHIPAMENT PENTRU INSTALATII SI REELE DE GAZE; CONFECTII METALICE; PIESE TURNATE DIN NEFEROASE; SERVICE.

OXY-GAS CUTTING AND WELDING KITS; PRESSURE REDUCERS FOR GAS CYLIDERS; ACETYLENE GENERATORS AND MINIGENERATORS ;
ALL VALVES ;MEDICAL EQUIPMENT; DEVICES FOR DIVING EQUIPMENT; EQUIPMENT FOR GAS INSTALLATION AND NETWORKS; METAL
CONSTRUCTION ;NON - FERROUS METAL CASTINGS;; SERVICE.